

Product



Panini Waffletechnology Check Scanner Cleaning Card

Product Name: Panini Waffletechnology Check Scanner Cleaning Card
Item Number: KWPNI-CSB15WS
Style: Waffletechnology

Pouch Label: Panini Waffletechnology Label

Pouch Width: 5.5 Inches
Pouch Length: 8.75 Inches

Solution: Wonder Solvent
Volume: 2ml (+/-0.5)

Card Material: White fabric/plastic core/white fabric
Card Dimensions: 4.25" (+/-0.0625) x 7.25" (+/-1.08) (+/-1.6) x 184.15 (+/-1.6)
Card Thickness: 0.012 (+/-0.002)
Thickness(mm): 0,432 (+/-0,051)
Corner Radius: Square Corners

Special Features: Bias Waffles .110 high (+-.020)
Standard Waffles .110 high (+-.020)

Packaging: Inner Pack Master Casing

Quantity:	15 saturated cards	22 Inner Packs
Labeling:	Panini Waffletechnology Label	
Package type:	Clay Coated Chipboard box	Corrugated (200 lb test)
Dimensions:	9.375" x 2.63" x 5.75"	21" x 19.5" x 9"
Dimensions (mm):	238,1 x 66,82 x 146,0	533,4 x 495,3 x 228,6
Weight:	.58 lbs	15 lbs
Cubic Ft:	N/A	2.13 cf
Cards per unit:	15 / Chipboard Box	330 /Carton
UPC Code	644218120022	

Palletizing

Quantity: 20 Master Cartons
Dimensions: 50.5" x 40" x 48"
Dimensions (mm): 1282,7 x 1016,0 x 1219,2
Weight: 300 lbs
Cubic Ft: 56.33 cf
Cards per unit: 6,600 / Pallet

Copyright owned by
manufacturer
Patent Pending

Product



Panini Waffletechnology Check Scanner Cleaning Card

Pouch Front



Advanced Solutions
for Document Processing

Check Scanner Cleaning Card



Use on Panini Vision X™ and My Vision X® Check Scanners
to ensure consistent check processing on every scan.

This product has been developed to remove endorsement ink residue, paper flash, and other debris, left behind during normal operations, from lenses and pathways within the Panini Vision X™ and My Vision X® Check Scanners.

This is the only product recommended for use in the
Panini Vision X™ and My Vision X® Check Scanners.

For more information refer to your owners manual

Pouch Back



Advanced Solutions
for Document Processing

Check Scanner Waffletechnology Cleaning Card

Weekly Cleaning

It is recommended to run the cleaning card through the check scanner once a week. This will remove ink, dust and dirt buildup from the rollers and image cameras. This will extend the interval between needed manual cleaning for these components.


Directions:

1. Remove the Ink Cartridge from the machine if present.
 2. Start an application, which will feed documents, Capture Application, MyDemo, etc.
 3. Run the cleaning card through the Panini Vision X™ and My Vision X® 3-7 times, each time rotating the cleaning card top to bottom as well as flipped over so the cleaning card is inserted each time with a different orientation.
 4. Cancel the application, discard the used cleaning card, and replace the ink cartridge if needed.
- Note: The cleaning card is not intended to remove debris from the track, clean the sensors, clean the ink cartridge, or replace the cleaning procedures outlined in the operator's manual.



Waffletechnology™ is a registered trademark of the Manufacturer. Patent Pending

Drawing Card

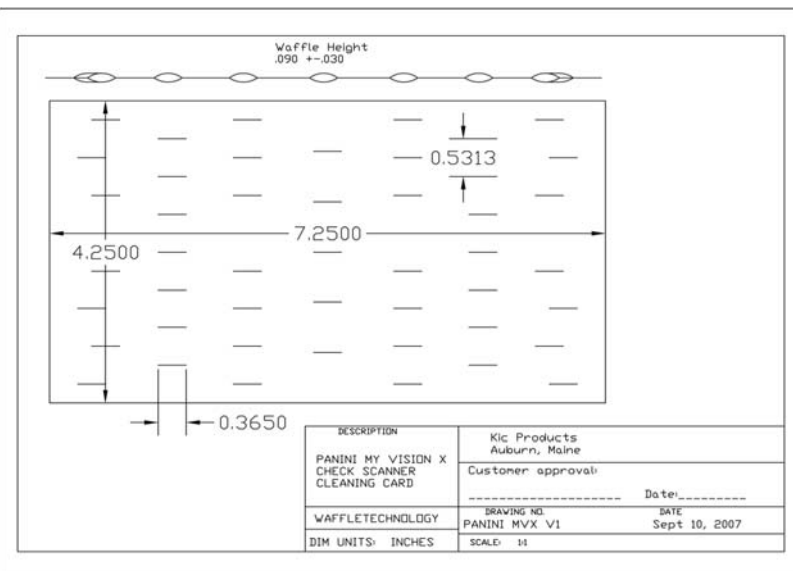

Copyright owned by
manufacturer
Patent Pending